

Features:


- ◆ 2 Way-0° Power Splitter/Combiner
- ◆ 50Ω Impedance
- ◆ Power Input(as a splitter): 0.25W
- ◆ DC current: 30mA
- ◆ Operating temperature range: -40°C to +85°C
- ◆ Storage temperature range: -55°C to +100°C



Applications:


- ◆ For all CATV Broadband and FTTx applications
- ◆ For VHF/UHF receivers/transmitters and push-pull amplifiers

Dimension Diagram (Unit:mm) :

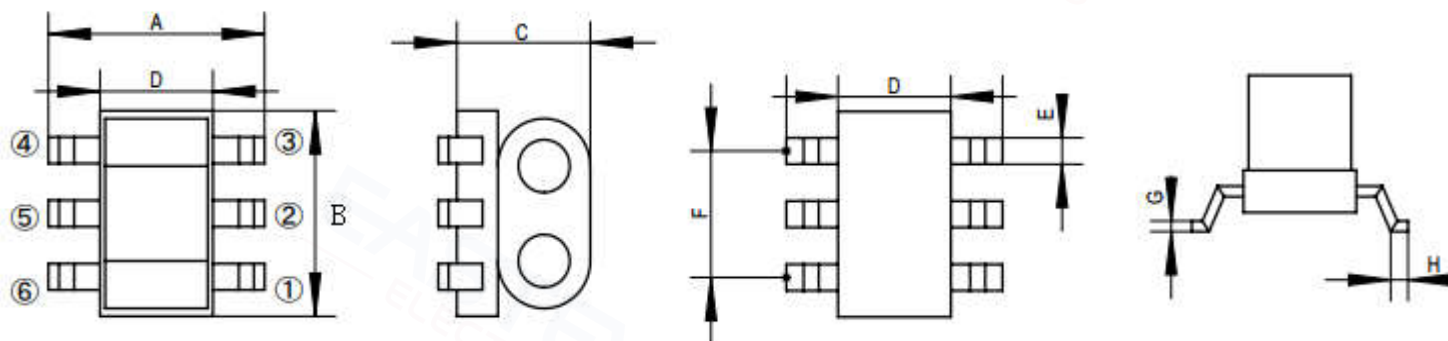


A=5.10±0.20 B=4.30±0.20 C=3.20±0.20 D=2.80±0.20 E=0.50±0.10 F=3.00±0.10 G=0.25±0.10 H=0.50±0.10

Electrical structure:

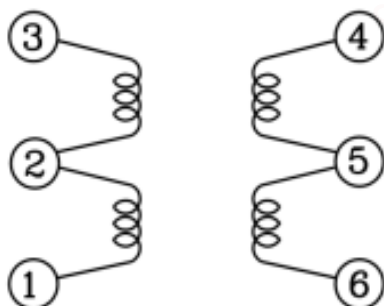


Recommended layout are inches [mm]:

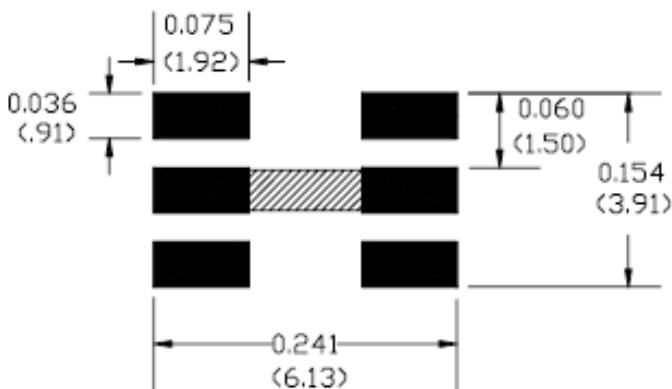

Pin configuration:

Pin No	Function
1	Input
4	Output 1
6	Output 2
3	Ground
4、6	EXE.RESISTOR 100Ω
2、5	EXE.CAPACITOR 2pF


Application circuit :

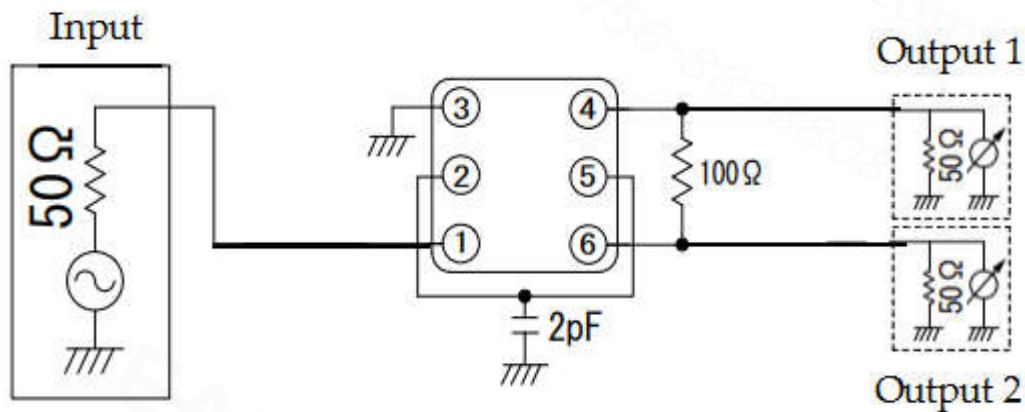


Electrical Specifications: TA=25℃, 0dBm,Z0=50Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss(out1)	3-10MHz	dB	—	4.0	6.0
	10-100MHz	dB	—	3.5	5.5
	100-100MHz	dB	—	4.2	6.5
Main line Loss(out2)	3-10MHz	dB	—	4.5	6.0
	10-100MHz	dB	—	3.8	5.5
	100-100MHz	dB	—	4.2	6.5
Input Return Loss	3-1000MHz	dB	8.0	25.0	—
Output 1 Return Loss	3-1000MHz	dB	10.0	25.0	—
Output 2 Return Loss	3-1000MHz	dB	10.0	30.0	—
Isolation	3-1000MHz	dB	19.0	28.0	—


Main line Loss(Output1)

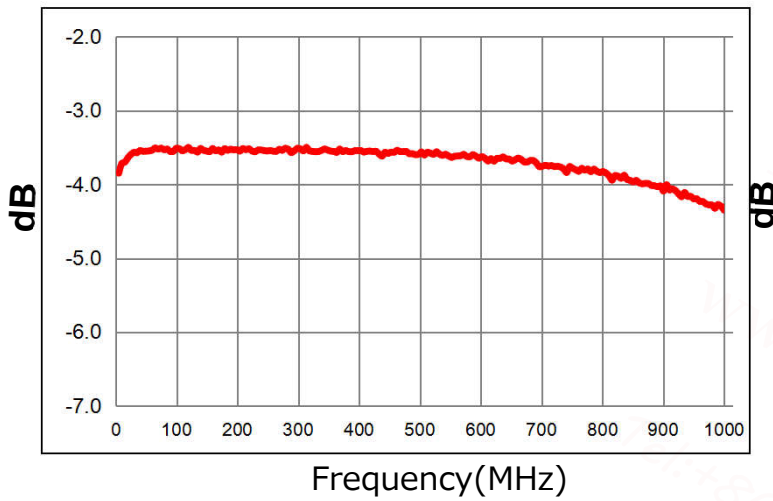


Isolation(Pin4-6)

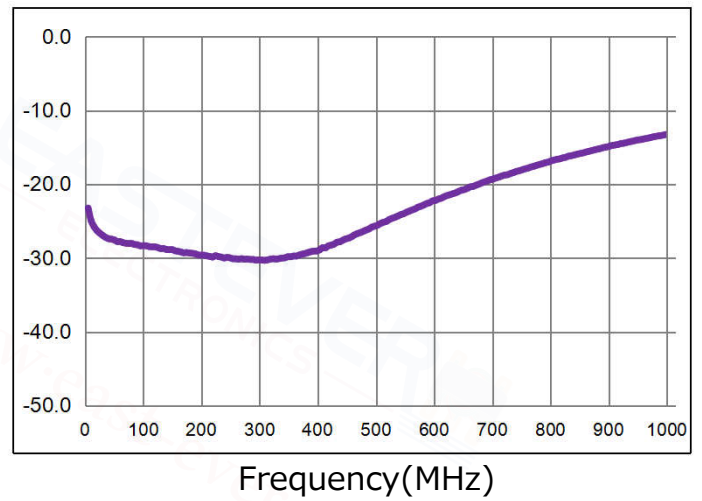


Main line Loss(Output2)

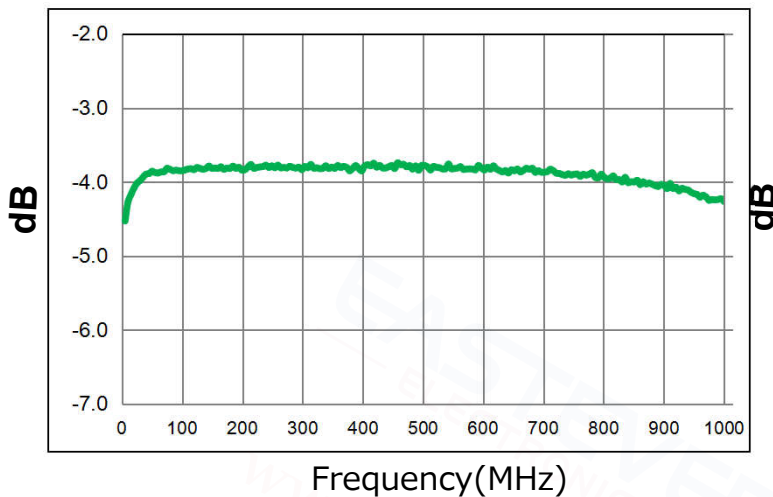


Input Return Loss(Pin1)

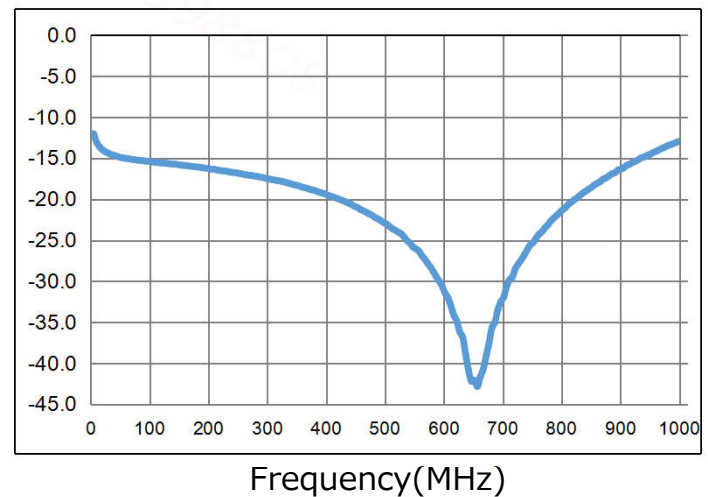


Output 1 Return Loss(Pin4)

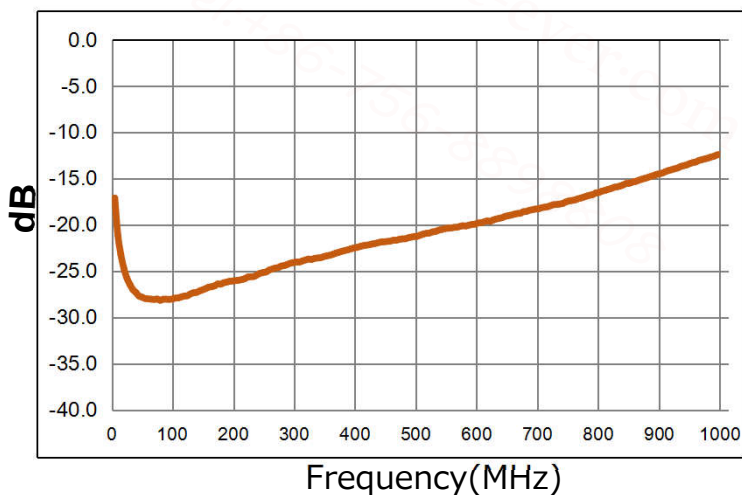

Output 2 Return Loss (Pin6)

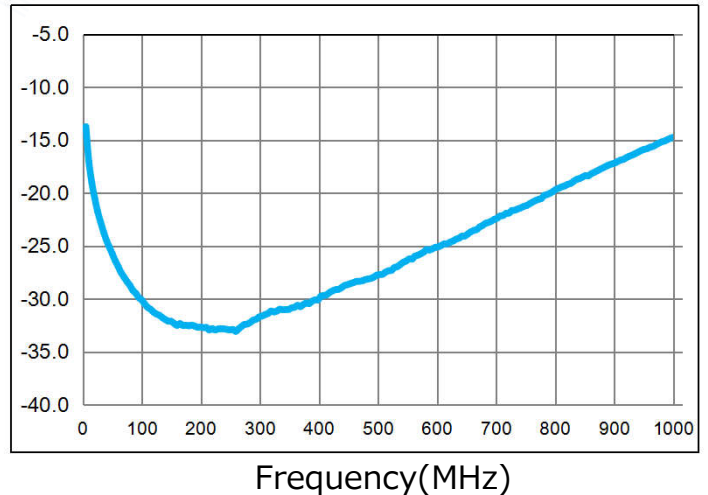


Network Analyzer Test Data Sheet Photos:

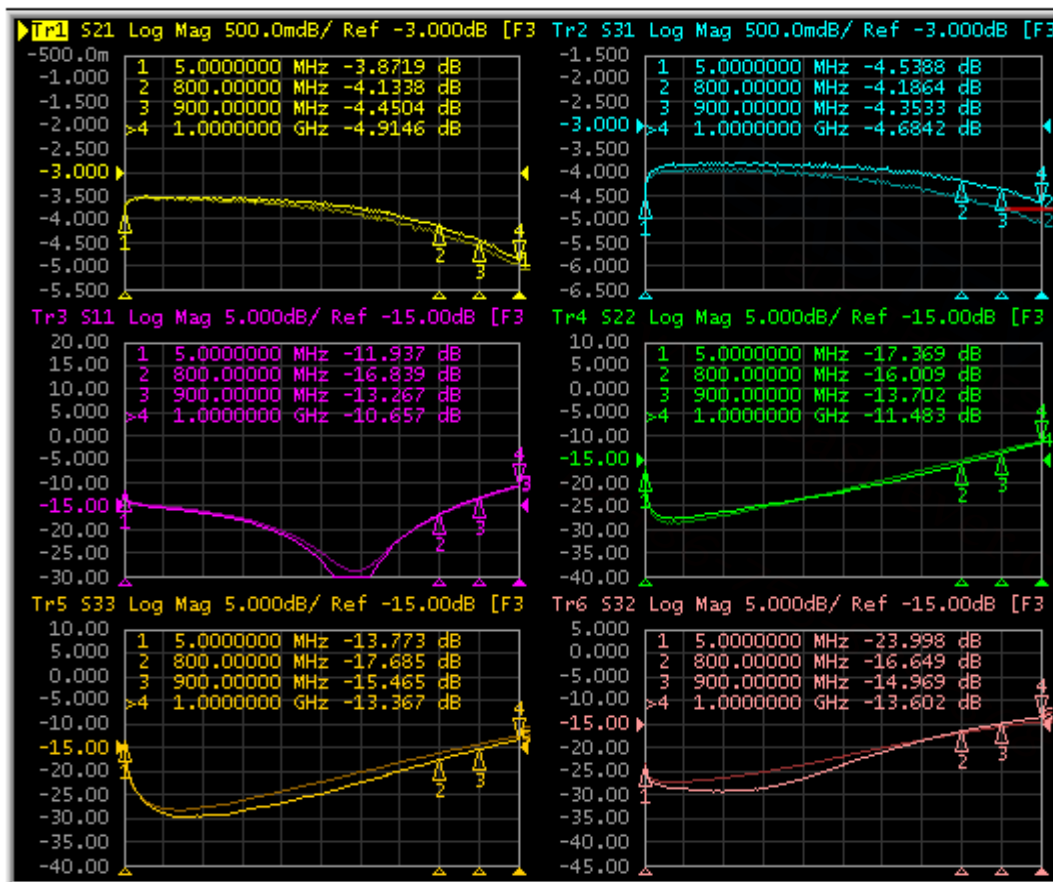


Murata Sample

Packing Dimension For Caeier Tape(UNIT:mm):

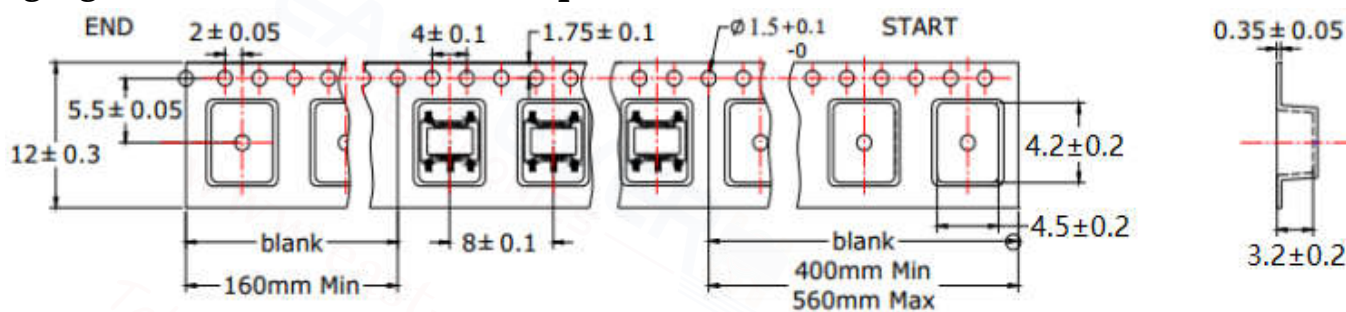

QUANTITY
2000PCS/Reel
4Reels/Middle Carton Middle Carton:
4 Middle Cartons/Big Carton
32000PCS/ Big Carton



SPEC	8	12	16	24
DIM A±0.1	8.5	12.5	16.5	24.5
DIM B±0.1	2.3	2.3	2.3	2.3
DIM C±0.1	100	100	100	100

